



Installation and User Manual

TAKE CONTROL 



Features:

- ATEX/IECEx Zone 1 and Zone 21 certified for use in explosive gas and dust areas.
(Certificate:- BAS21UKEX0847X / Baseefa11ATEX0005X / IECEx BAS 11.0002X)
- Multiple sensor / multiple light configurations are possible
- Microwave Doppler technology
- Ambient light level sensor
- Adjustable switch on time
- Adjustable sensitivity and detection range
- ATEX Certified Remote control programmer
(Certificate(s):- BAS22UKEX0117 / 21ATEX0096 / IECEx BAS 12.0126)
- 110 / 230Vac operation or 24Vdc operation
- 10A direct relay output
- Control input 12/24Vdc to override the detection sensor

For Warranty and Terms & Conditions please refer to: www.Ex-Mo.co.uk.

Contents

Description & Operation	2-4
Applications.....	5
Connections, Power Supply, Mounting Bracket, Relay Output.....	6-7
Coverage.....	7
Mounting	7
Relay Output	8
Connection Diagram	9
Installation - Setup.....	10
Installation - Setup via remote control	11-13
Remote control	14-15
Ex-Mo Specification	16-17
EX-MORC01 Remote Control User Handbook.....	17-18
EX-MORC01 Specification.....	19
Manual & ATEX/IECEX Certificate Weblinks	21
Ex-Mo EC Declaration of Conformity.....	22
Ex-MoRC01 Remote Control EC Declaration of Conformity	24

Description

The Ex-Mo comprises of an Ex d enclosure, containing an electronic assembly. All field and customer wiring is to the Ex d enclosure and the cover of the Ex d enclosure is only removed for commissioning and periodic adjustment. Detailed instructions on the wiring, first time use and normal operation of the system are described in this Manual

Normal Use

The Ex-Mo normally operates within a Hazard Zone 1 / 21. All electrical signals to and from the unit are protected by suitable cables, glands and conduits. In normal use the unit emits a signal and receives a reflection from an object. By this means it can determine whether to switch the relays to control lighting or alarm triggers.

Installation and Calibration

The Ex-Mo must be installed and commissioned by suitably trained personnel. Normally, the unit is mounted and wired to a fixed position on a building; if this is not the case then specific instructions will be provided. The user is required to make electrical connections to their systems according to the wiring instructions in this Manual using suitable cables and connection components. No changes to the equipment or the wiring instructions are permitted. Following connection, and with no hazard present, the unit may be powered up to adjust the sensitivity and other settings. If the electronics are set to “Remote Control” use, the glass cover lid may be fitted and the unit sealed for hazardous operation while still allowing adjustment via the remote control through the window.

Maintenance

The cover on the Ex d enclosure must not be removed when a hazardous atmosphere is present. The unit must be left for 30 minutes with power off before the cover is removed. With access to the instrument, it is possible to modify the configuration according to this Manual. In the event of suspected damage to the electronic assembly, the circuit boards can be unclipped and removed. The internal chassis plate carrying the instrument can be removed by unscrewing the rear terminal connectors from the power circuit board, removing the circuit board, unscrewing the securing fixings, and removing. The instrument should be packed in antistatic material and sent to the Manufacturer for evaluation. No part of the equipment is user serviceable.

Zone of Operation

The Ex-Mo can be used hazardous area Zone 1 where a hazardous atmosphere is likely to occur occasionally. The equipment must not be installed in a Zone 0 area. The enclosure is protected to a liquid ingress rating of IP66 - it is dust-tight and can withstand liquids exposure equivalent to heavy seas, if the Ex d enclosure lid threads are liberally coated with a conductive lubricant.

Safety Instructions

The equipment must be installed by skilled electricians or instructed personnel in accordance with National Legislation and relevant technical standards.

The equipment must NOT be operated in Zone 0 hazardous area. The technical data listed on the enclosure label must be observed. Changes to the design of the equipment are not permitted.

The equipment shall only be operated as intended and only in an undamaged condition. No parts of the equipment are user serviceable.

Following installation the ExMo must be kept free of harsh & abrasive substances and should be cleaned with a damp cloth.

Physical Description

Overall Size 145 x 132 x 129


Weight 2.5kg (Ex d enclosure), 1.5kg (Aluminium enclosure)

Material Aluminium in yellow chemical resistant paint (outside only) or 316L Stainless Steel

Equipment rating IP66 – Ex d enclosure lid threads liberally coated with conductive lubricant

Earth point Right hand side M5 internal/external bolt (provided)

Cable entries In the Ex d enclosure base. Unused entries must be plugged with Ex d certified plugs.

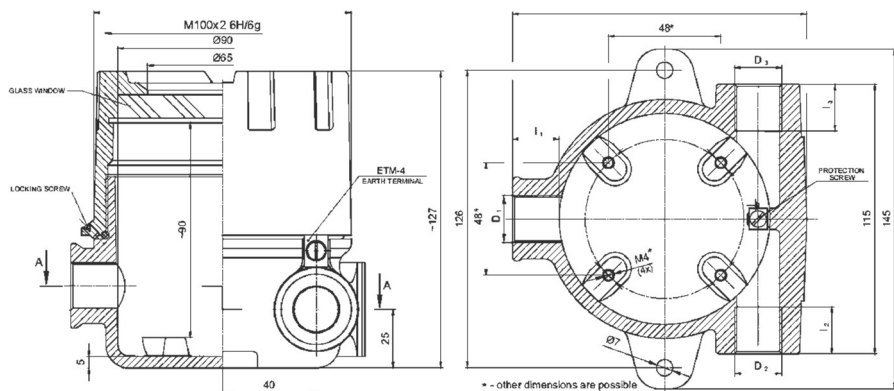

Applications

This unit can provide energy saving by automatically switching off lights in areas that are unoccupied.

- Movement detection in remote working areas, remote sites.
- Control lighting in infrequently used spaces.
- Alerting control centre; Detecting: people / vehicles / other moving objects.

Operation

Sensing movement by microwave, the Ex-Mo will switch on the lights for a period of time while the area is occupied. Roof or wall mounted with the optional adjustable bracket; several Ex-Mo units can be paralleled to obtain a large area of coverage controlling the same lighting circuit. Alternatively, several lights can be controlled from one sensor up to the maximum 10A current. Ex-Mo can operate a higher rated external contactor if required or supply a signal to an energy management system.

Adjustable on-time from 5 minutes to 60 minutes and adjustable range sensitivity. Operating with a range of 15 to 20 metres.

Connections


ATEX / IECEx approved cable glands, entry blanking plugs and correctly sized cable are mandatory for the use of this equipment in hazardous areas. All these products are available on request.

Power supply

The standard Ex-Mo is powered by mains 230Vac or alternatively we can offer 110Vac or 24Vdc as a factory supplied option. This information is usually supplied when ordering the Ex-Mo.

Ex-Mo Mounting Bracket

Manufactured from 3mm stainless steel. M6 clinch nuts throughout.

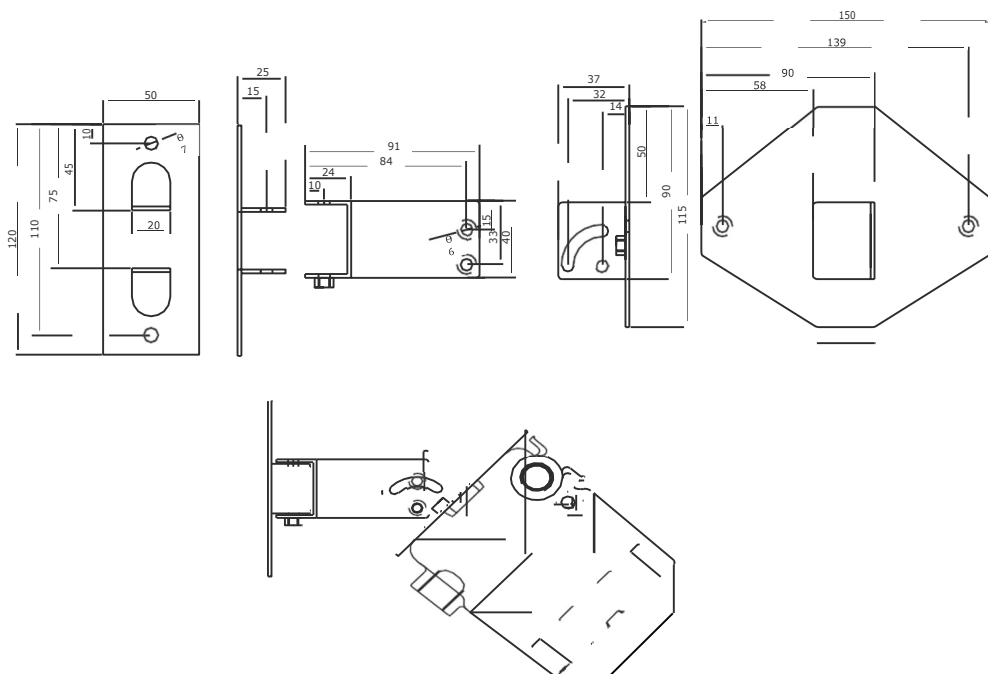

Coverage



Ex-Mo has a coverage pattern of $\sim 72^\circ$ horizontally and $\sim 36^\circ$ vertically. This represents the angular coverage where 70% of Ex-Mo's sensitivity is maintained. In practice Ex-Mo will detect 90° so that a single Ex-Mo placed in the corner of a rectangular room will give complete coverage along the walls

Mounting

Ex-Mo must be securely mounted to a fixed object. Any movement of the sensor could activate the unit as if it were detecting a moving target.

Mount the Ex-Mo on a wall facing the direction of the area to be monitored. Using the adjustable bracket, angle the face of the Ex-Mo toward the target area.

The high frequency radar operates best when a target is approaching or moving away from it. The Microwave Beam is emitted from the front face and is directional. See diagram below.

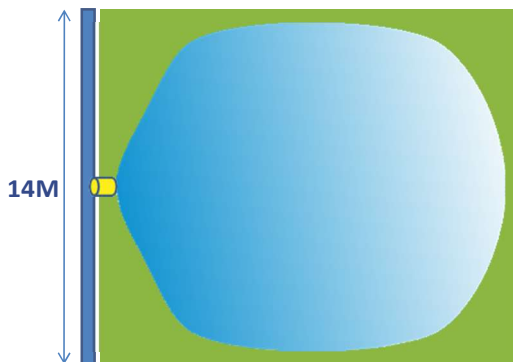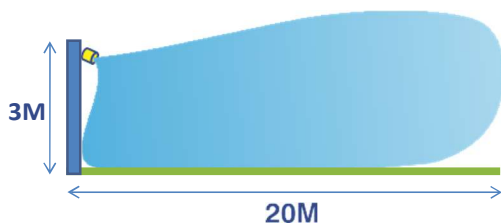

Relay outputs

One output relay is provided. The relay output is capable of taking a 10A continuous load.

- 'Relay 1' (10A) operates to switch on lighting when movement is detected and it is sufficiently dark.

Relay 1 is configured as normally open (NO).


The relay output is isolated (1000Vrms) and can be used as 'volt free' contacts with an external supply not exceeding 125Vac/250Vac. Useful as a signal for example into a lighting control system or to feed a larger contactor.

Alternatively Relay 1 can power lighting directly from the internal mains supply.

PLEASE NOTE

If you are required to use the Ex-Mo as a motion-sensor to switch lighting or inductive loads, please ensure that Relay 1 (10A) is used.

Connection diagram - Typical 230 VAC connection

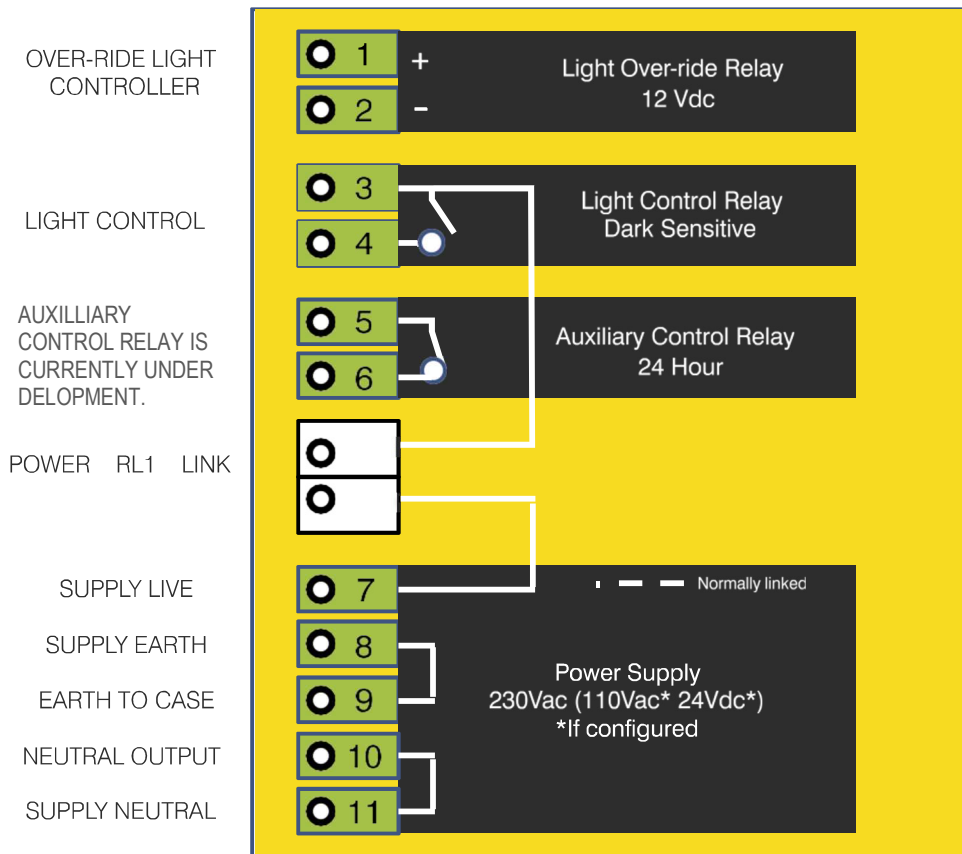

Installation And Initial Setup

Ex-Mo's parameters are set using the remote controller.

The equipment must be installed by skilled electricians or instructed personnel in accordance with National Legislation and relevant technical standards.

Please read this handbook carefully before commencing installation of Ex-Mo and retain for future reference.

Remove Ex-Mo and any accessories carefully from its packaging.

Ex-Mo can be mounted in two orientations dependent on your preferred cabling route. The optional Ex-Mo mounting bracket must be appropriately positioned facing the target area as described in the coverage and mounting section of this manual.

Make sure mounting surface is flat

Ex-Mo can now be attached in either orientation to the fixed mounting bracket and positioned toward the target area. Once the required position has been established all adjustment points should now be fully tightened.

Ensure that Ex-Mo is earthed and note that the unit is not internally fused.

After loosening the retaining locking screw on the lid turn the lid anti-clockwise to remove from the main body. Any internal packaging is for transport purposes ONLY and should be removed before replacing the lid. For termination within the Ex-Mo unit please remove the top circuit board by gently extending the two fixing prongs outwards. The green terminal block on the lower circuit board can now be unplugged to aid termination.

On completion of Ex-Mo internal termination ensure that the top circuit board is re-fitted in the correct orientation i.e. with the Ex-Mo label the correct way up.

The Ex-Mo lid can now be re-fitted ensuring that the lid is tight enough to maintain the IP rating, remembering to tighten down the retaining locking screw.

Ex-Mo can now be installed within the recognized code of practice e.g. EN60079-0

IMPORTANT NOTE

THE Ex-Mo unit is shipped with "Power RL1 Link" in place. For "Volt Free" operation please REMOVE RL1 Link.

Installation - Setup via Remote Controller

The remote controller can be operated in the hazardous area with the lid to the unit fitted and sealed. The remote control is directed towards the glass front and should have a range of up to 10 metres. The Red LED quick flash indicates that the remote-control signal was acknowledged.

Setting the Light Sensitivity- Method 1 (Pre-set Light Levels)

- Press 'Walk Test' (Ensure the Ex-Mo is in walk-test mode by red and yellow LED lights flash together)
- Set the light sensitivity level with the arrow keys. Refer to page 13 of the user manual for desired setting (Level 1-5)
- The level set is indicated by the amount of times the red and yellow LED flash together. For example; two flashes indicates that the Ex-Mo is set to level 2. Please see light Level Indicator Chart for further options.
- You can only go up and down through the levels one at a time. For example, you cannot go from level 1 straight to level 5.
- Set the time delay that you require. You can choose to have 5 minutes, 30 minutes or a one-hour time delay. This is the amount of time that the lights will stay on after the last movement within the vicinity of the Ex-Mo
- Press 'Auto Mode,' to confirm the changes that you have made.






Setting the Light Sensitivity- Method 2 (Current Ambient Light)

- Make sure lighting environment is to desired conditions.
- Press 'Walk Test' (Ensure the Ex-Mo is in walk-test mode by red and yellow LED lights flash together)
- Press 'Light Set Now.' The red LED will then flash on off for 2-4 seconds. This indicates that the Ex-Mo has measured the current light ambience. This operation will now enable the Ex-Mo to switch the lights on when movement is sensed. This now means that if gets lighter than the measured light ambience... The Ex-Mo will switch off the lights.
- Set the time delay that you require. You can choose to have 5 minutes, 30 minutes or a one-hour time delay. This is the amount of time that the lights will stay on after the last movement within the vicinity of the Ex-Mo
- Press 'Auto Mode,' to confirm the changes that you have made.

Setting the Movement Sensitivity (Range)

- Make sure that the Ex-Mo is in 'Auto Mode,' (working mode).
- Either set the sensitivity up or down with the sensitivity arrows
- To test the sensitivity, either walk towards or away from the Ex-Mo. When the strobe light goes out you know that you are out of range. This enables the installer to determine whether to decrease or increase the movement sensitivity.
- Any change in sensitivity is acknowledged, by the Ex-Mo, by a brief flash from the red and yellow LED lights.

Example: If the unit is on **Level 3 already**, pressing 'Light inc' will show the following sequence.

LED SHOWN		
Remote Acknowledged		Brief flash at button press
2 seconds		
	Count 1	
2 seconds		
	Count 2	
2 seconds		
	Count 3	
2 seconds		
	Count 4	
3 seconds		
Back to Normal Operation		

This indicates that the unit is now set to ambient light Level 4

Notes: These settings are stored in the memory of the Ex-Mo to be recovered after power off and on.

LED indicator functions:

- RED:**
- Indicates the remote control has been pressed, brief flash.
 - 1 second on, 1 second off, indicates 'Auto mode' is set and the unit powered and running properly.
 - Brief flash on, 1 second off indicates 'Manual mode' is set and the unit powered and running properly
- YELLOW:**
- On, indicates the ambient light is below the threshold level set. Off indicates the ambient light is bright enough to switch the lights off.

- WHITE: · On, indicates that movement has been detected. (Operates only below ambient light levels).
- YELLOW and RED: · Show together in normal operation. Also shown together during 'count' for light level setting with remote control.
- YELLOW and RED: · These three can be on briefly during normal operation.
- and WHITE: · On continuously: Indicates the 'Override relay' has been energised externally.
- and WHITE: · This puts the lighting relay on permanently while energised. (For emergency override use etc.)

Common Light Levels Outdoor**

Common light levels outdoor at day and night can be found in the table below:


Condition	Illumination (ftcd)*	(lux)	Ex-Mo Light Level Set
Sunlight	10,000	107,527	
Full Daylight	1,000	10,752	
Overcast Day (Light cloud)	325	3500	1
Overcast Day (Dark cloud)	100	1,075	2
Very Dark Day	10	107	3
Twilight	1	10.8	4
Deep Twilight	0.1	1.08	5
Full Moon	0.01	0.108	
Quarter Moon	0.001	0.0108	
Starlight	0.0001	0.0011	
Overcast Night	0.00001	0.0001	

Ex-Mo Range

*foot/candles

**Data from http://www.engineeringtoolbox.com/light-level-rooms-d_708.html

EX-MORC01 Infra-Red Controller Functions

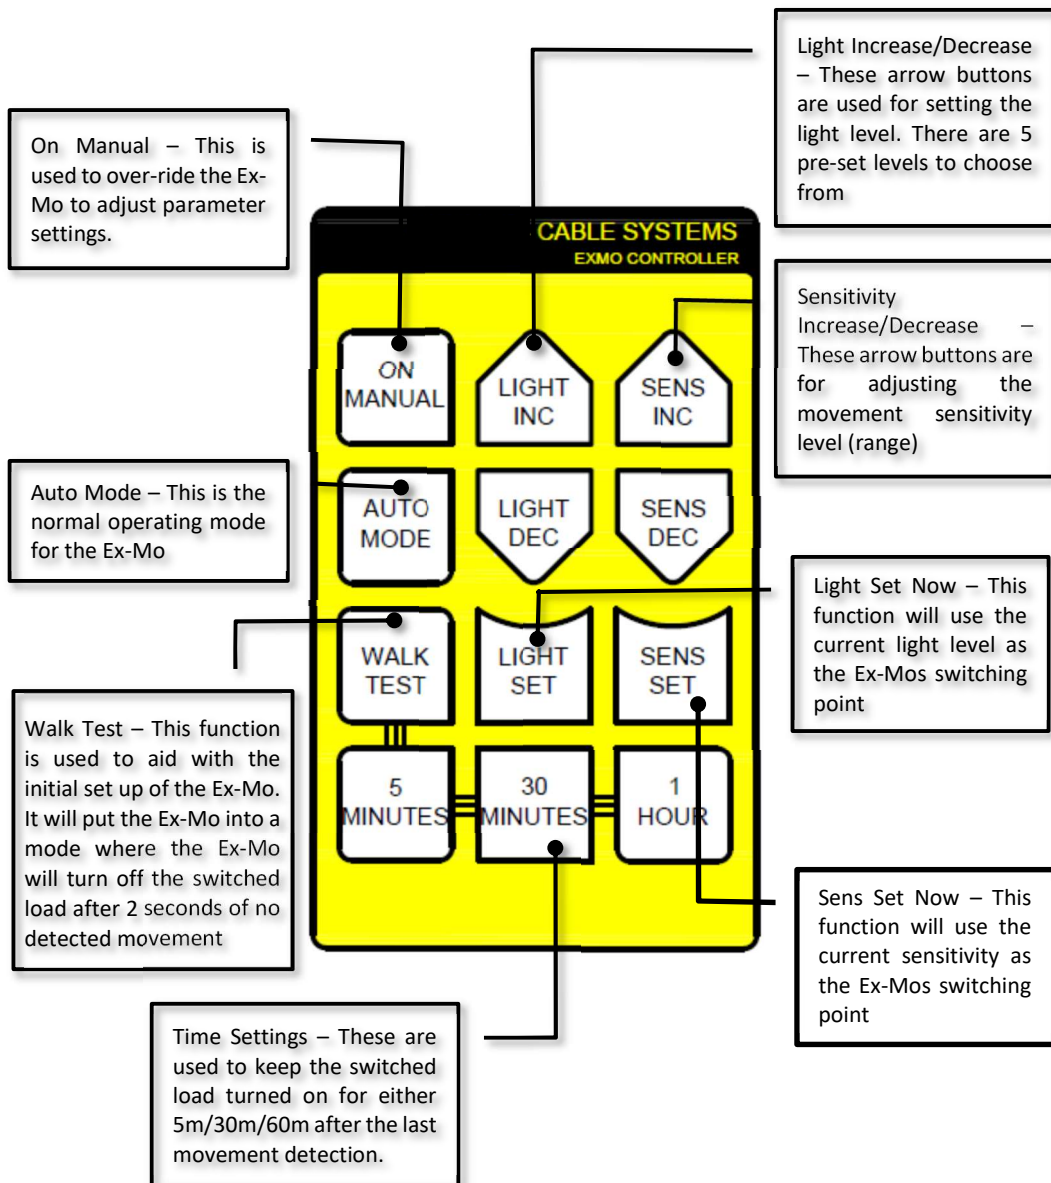

Specification

Supply voltage	110 / 230Volts AC, 50 Hz
Relay 1 current maximum	10A 250Vac continuous each (resistive load)
Relay 1 Voltage maximum	250Vac
Relay 1 Isolation	1000Vrms
Relay 1 maximum breaking capacity	2500VA
Relay 2 current maximum	1A at 24Vdc 0.5A at 125Vac
Relay 2 Voltage maximum	125Vac, 60 Vdc
Relay 2 Isolation	1000 Vac
Relay 2 maximum switching power	62.5VA, 30W
Override input relay	Factory standard: 12Vdc coil 12mA rated current. 960Ohm coil Must operate voltage 80% of max rated voltage Must release voltage 10% of min rated voltage
Adjustable Time	5-30 and 60 minute delay times available
Safety	 II 2 G D Ex db IIC T6 Ta -40°C to 54°C Gb Ex tb IIIC T85°C Ta -40°C to 54°C Db IP66
Current capability	1 x 10A + 1 x 1A Open contact relays selectable NC or NO operation
Temperature range	Ambient -40°C to 54°C
Fixing	Flat surface mounting or with optional swivel and tilt bracket
Conformity	ATEX / IECEx / CE / UKCA
Certificates	Baseefa11ATEX0005X / BAS21UKEX0847X / IECEx BAS11.0002X
Remote control unit	ATEX / IECEx / IS approved
Sealing	IP66

Specific Condition of Use:-

The flame-paths are not to be repaired

If the enclosure is painted aluminium rather than stainless steel it must be installed to avoid a risk from propagating brush discharges for application in explosive dust atmospheres.

For Copies of the ATEX/IECEX Certificates / Manuals / Brochures / Warranty.



Unit Manufacturing Data
Sticker here


**Declaration of Conformity in accordance with European
Directive 2014/34/EU and UK Statutory Instrument
2016/1107**



Manufacturer: Cable Systems Ltd

Address: 2-6 Gawsworth Court, Risley Road,
Birchwood, Warrington, Cheshire WA3 6NJ
United Kingdom

Equipment Type: Ex-Mo Motion Sensor and Light Controller. In aluminium with
coated surface or stainless steel with uncoated or coated surface.

Markings:  II 2GD
Ex db IIC T6 Ta -40°C to +54°C Gb
Ex tb IIIC T85°C Ta -40°C to +54°C Db IP66

We declare, as the manufacturer, the equipment type described above conforms to the following directives and harmonised standards.

ATEX Directive: 2014/34/EU
UK Statutory Instrument: 2016/1107
Harmonised Standards: EN IEC 60079-0:2018
EN 60079-1:2014
EN 60079-31:2014

Notified Body for
EU-Type Examination: SGS Fimko Oy 0598, Särkiniementie 3, FI-00211 Helsinki, Finland

EU-Type Examination
Certificate: Baseefa11ATEX0005X
Latest supplement Baseefa11ATEX0005/2 issued 31st January 2013

Notified Body For
Production: 0598

Approved Body for
UK-Type Examination: SGS Baseefa 1180 Buxton UK

UK-Type Examination
Certificate: BAS21UKEX0847X

Approved Body For
Production: 1180

Approved by:

Mr DJ Rigby:
Managing Director

Date & Place: 14th June 2022, Warrington, Cheshire UK

This declaration certifies compliance with the intended directive but no warranty of properties. For safe and correct use of this product, the information given in the installation and user manual must be followed.

Ex-Mo Warranty Policy

Cable Systems Ltd Warranty the Ex-Mo units and Controller (excluding battery) as free from manufacturing defects for a period of 1 (one) year from the Invoice date.

In the unlikely event of any defect Cable Systems Ltd will undertake to repair or replace the unit at our expense.

To arrange the return of any Ex-Mo Products for a Warranty claim please contact us using sales@cablesystems.co.uk and request an RMA (Return to Manufacturer Authorisation) number and quote the relevant product serial number(s).

Return Carriage to and from Cable Systems Ltd is the responsibility of the Customer/User until such time as the cause of the fault is established. In the event of a Warranty claim being accepted reasonable carriage costs will be refunded.

Ex-Mo
2-6 Gawsworth Court,
Risley Road Birchwood,
Warrington,
Cheshire
WA3 6NJ

T 01925 852745

www.Ex-Mo.co.uk | sales@Ex-Mo.co.uk

ALC-410 Rev.06 02/23